



# Nokia Lumia 505 Teardown

Teardown !! this guide will teach you how to disassemble your phone :)

Written By: Ramiro diaz





## TOOLS:

- [T5 Torx Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [iFixit Opening Picks set of 6](#) (1)
-

## Step 1 — Remove rear cover



- Remove the back cover
- Remove the battery and SIM card


## Step 2



- Remove the 8 screws Torx T5
- Insert a guitar pick between the frame of the phone
- you lever until the frame is separated



## Step 3 — Motherboard

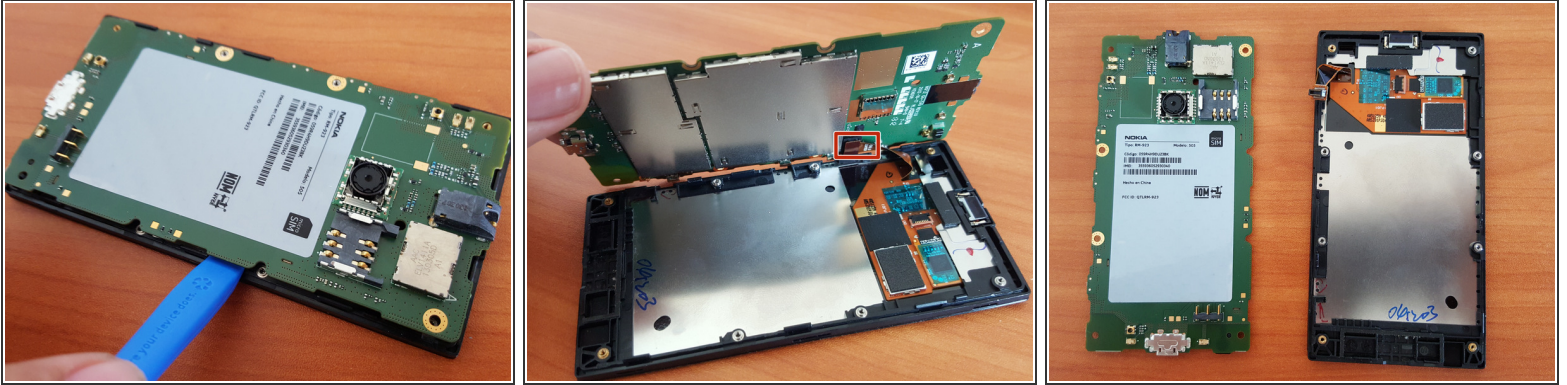

- you have the right lever to remove the Motherboard
- ⚠ Not withdraw from the whole and that is still connected with the screen
- removes the cable pushing it down

## Step 4 — screen



- to remove the screen we have to push from the inside out
- since thrust it, a space between the screen and the frame was created, there will a guitar pick
- the following is the pua move around the screen frame to separate

## Step 5 — ready



- ready

This document was last generated on 2017-08-04 11:49:07 PM.